



# UDHOME

## Floor socket and floor box

Elegant, discreet and robust





## Floor sockets and floor boxes: for perfect power and data connections

The range of UDHOME complete units can position power, data and multimedia technology exactly where they are required. Floor sockets and floor boxes of the UDHOME family are mounted directly on the raw floor and connected with flexible installation pipes – it couldn't be simpler.



UDHOME2



UDHOME4

# Elegant, discreet and robust

Thanks to their elegant, discreet design, UDHOME floor sockets and floor boxes integrate themselves seamlessly into the interior architecture. When the hinged cover is closed, only the high-quality surfaces of pure stainless steel or solid brass are visible. Thanks to their stable construction, the floor sockets and floor boxes are also resistant to the everyday loads in homes, offices and administrative areas.




Easy handling from ordering to mounting



High-quality materials and solid processing



Maximum flexibility in equipment

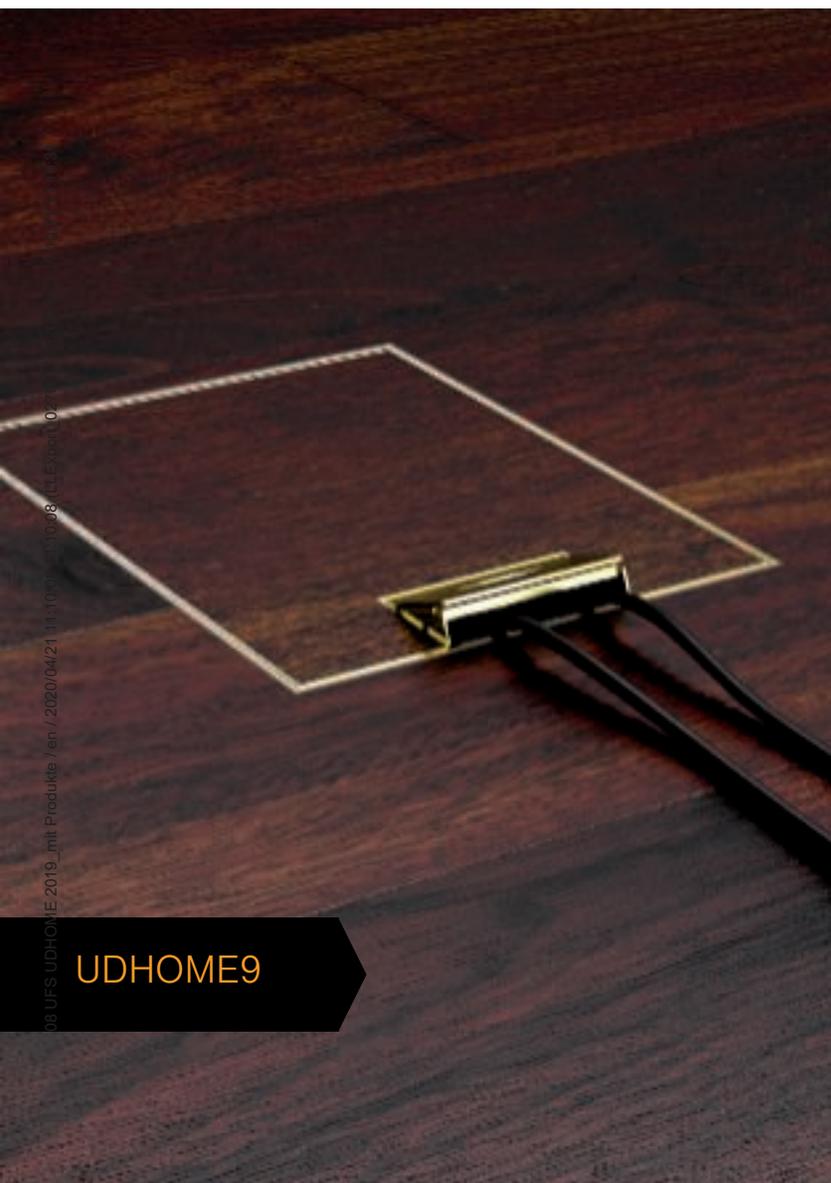

38 UFS UDHOME 2016\_mit Produkte / en / 2020/04/21 11:10:55 / 008 / ELE / 01

UDHOME9

## A special customer: Old Master in a new light

**Architect: Michele de Lucchi**  
**Museo della Pietà**


Museo della Pietà in Milan is home to the last, uncompleted masterpiece by Michelangelo: the *Pietà Rondanini*. The 89-year-old master worked on the sculpture, which depicts Jesus and Mary, just six days before his death in February 1564. The compact UDHOME floor sockets and a special solution of OKA trunking from OBO Bettermann provide a discreet and flexible power supply around the famous sculpture.



# Overview of the UDHOME series

## Floor boxes

The UDHOME4 and UDHOME9 floor boxes are the ideal solution for a wide equipment range and dry-cleaned floor coverings. The floor boxes offer a lot of space for the installation of power, data and multimedia connections and are available in discreet stainless steel and in stylish brass.

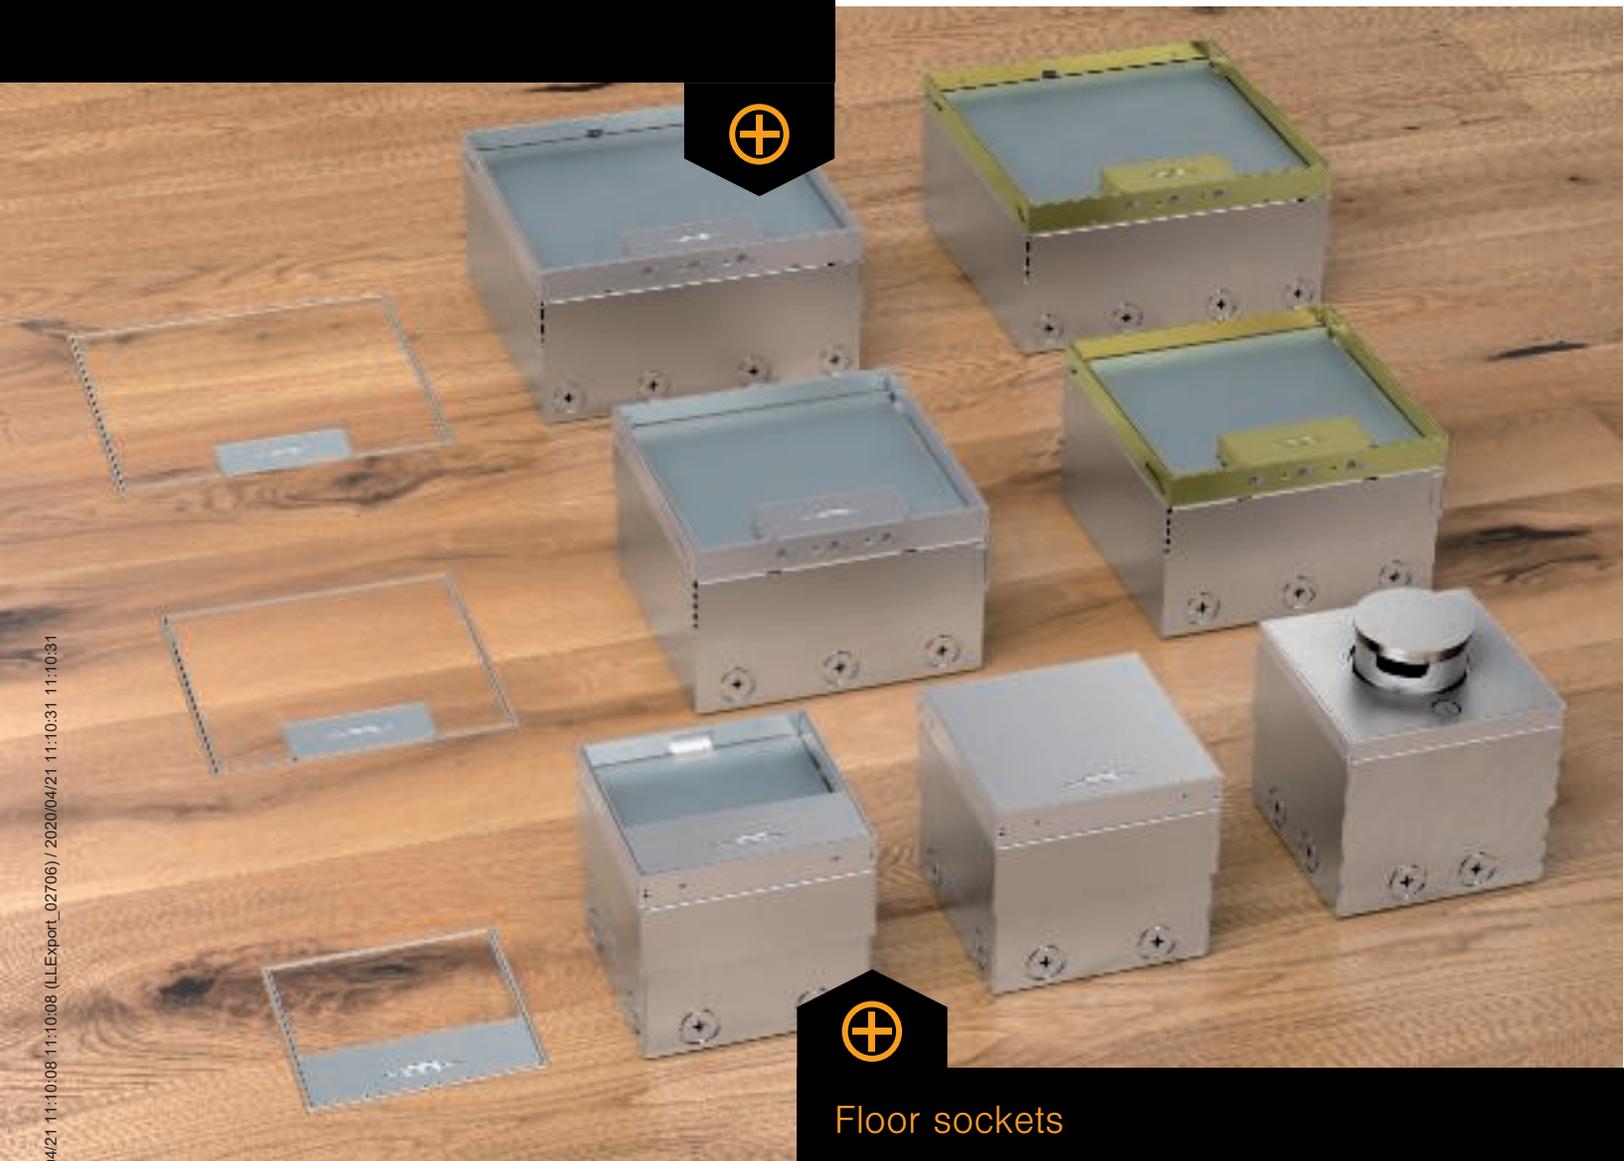

## Floor sockets

The UDHOME2 floor sockets, with their dimensions of 140 x 140 mm, combine both elegant appearance and functionality. The product range offers solutions for dry and wet-care floors. Stainless steel or brass are used as materials.

# Floor structure

Thanks to their compact design, UDHOME floor sockets and floor boxes require considerably less space in the floor than other electrical installation systems.

## Height adjustment to floor height

The UDHOME2 frame can be adjusted to the edge of the floor covering using 4 integrated height-adjustment supports. The height-adjustment range is 100/110–135 mm, depending on the cover version. A height extension can be mounted for higher floor structures – additional adjustment range: 10–60 mm.





## Tested quality

In addition, OBO tests its trunking and ducts and underfloor sockets in its own BET Test Centre. Thus, special solutions can be tested for their load capacity within a very short time.

## Simple infeed



The feeding in of cables is not complex. They are simply run in standard empty tubes in the screed up to the UDHOME.



## Small but perfect: UDHOME 2 floor socket

The UDHOME2 floor socket is available with a decorative cover and floor covering recess in stainless steel or brass. With its protection rating of IP45, the UDHOME2 floor socket with tube body and stainless steel cover is even suitable for use in wet-cleaned floors.



### Cover and cord outlet


The larger cord outlet for optimal cable exit can now be opened easily using the handle. The cover closes with a gentle click and can be used flexibly in all directions.



## Device installation

The scope of delivery for the UDHOME2 contains a double protective contact socket. Up to 2 modular data sockets can be installed with the mounting supports.

The installation space allows all connector types to be used. It is possible to close the cover, even when it is in use.



For a wide range of equipment:  
The UDHOME4 floor box




## Design

The UDHOME4 can fit neatly into high-quality interior architecture. All you can see is a slender metal edge and the cord outlet. The floor box is available in stainless steel or brass versions.

## Device installation

The UDHOME4 can be equipped flexibly with power, data and multimedia technology using 4 support ring devices or 6 Modul 45 devices.



## Height adjustment


The UDHOME has a height-adjustment range of up to 30 mm and can thus be adjusted to the level of the finished floor.





## Device installation

The UDHOME9 can be equipped flexibly with power, data and multimedia technology using 9 support ring devices or 12 Modul 45 devices.

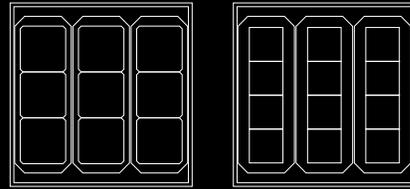


## Installed

The UDHOME9 is the largest floor box of the UDHOME family. It combines restrained design with a wide range of use options.

# Device installation

The UDHOME range can be equipped flexibly with power, data and multimedia technology. Our extremely comprehensive Modul 45 programme is ideal for this.

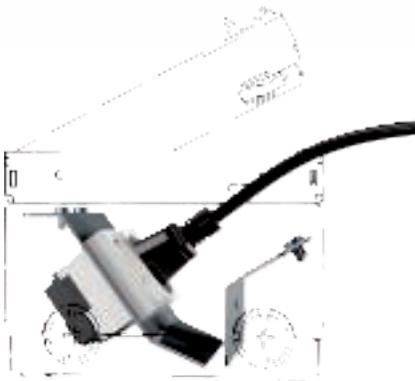

## UDHOME2 device installation

You can order UDHOME2 floor sockets pre-equipped with a VDE or NF double socket. There is also a version with an empty mounting support for individual equipping.

The installation space of the new UDHOME2 enables the cover to be closed, even when fully loaded with up to 4 connection cables.

In addition, up to 2 data connection modules can be installed in a support, which must be ordered separately.

## Device installation in UDHOME4 and UDHOME9

UDHOME4 and UDHOME9 are available in different pre-configurations. For example, a specific item number indicates that a triple socket is built into the UDHOME.

To meet project-specific requirements, the empty installation spaces of the universal support can be supplemented with additional sockets or data and multimedia technology thanks to the comprehensive Modul 45 product range.






Floor socket

### UDHOME2

140 x 140 mm  
2 Modul 45 devices  
2 data technology modules



Pre-equipped with  
2 x Modul 45 sockets




Floor box

### UDHOME4

199 x 199 mm  
4 support ring devices  
6 Modul 45 devices



Option 1: Installation of up to 6  
devices when equipped with 2  
universal supports  
(type UT3 45 3)



Floor box

### UDHOME9

243 x 243 mm  
9 support ring devices  
12 Modul 45 devices



Option 1: Installation of up to 12  
devices when equipped with 3  
universal supports  
(type UT4 45 4)



Mounting support for data tech-  
nology for the optional installa-  
tion of 2 additional data technol-  
ogy modules




Option 2: Installation of up to 4  
devices when equipped with 2  
support ring device supports



Option 2: Installation of up to 9  
devices when equipped with 3  
support ring device supports

**UDHOME2 floor socket, with floor covering recess, double VDE, stainless steel**



Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME2 GV15V</b>	110	110 - 135	15	1	230.000	<b>7368324</b>

A2 Stainless steel, rustproof


Square floor socket for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipes (M20/M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 110 mm, the height-adjustment range is + 25 mm.

Frame and cover made of stainless steel and visible in the floor covering.

The scope of delivery contains a double protective contact socket.

Up to two modular data sockets can be installed in the optional mounting support.

**UDHOME2 floor socket, with floor covering recess, double NF, stainless steel**



Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME2 GV15N</b>	110	110 - 135	15	1	230.000	<b>7368330</b>

A2 Stainless steel, rustproof


Square floor socket for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipes (M20/M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 110 mm, the height-adjustment range is + 25 mm.

Frame and cover made of stainless steel and visible in the floor covering.

The scope of delivery contains a double NF socket.

Up to two modular data sockets can be installed in the optional mounting support.

**UDHOME2 floor socket, without floor covering recess, double VDE, stainless steel**



Type	Dimension h mm	Floor height mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME2 GVV</b>	100	100 - 135	1	220.000	<b>7368326</b>

A2 Stainless steel, rustproof


Square floor socket for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipes (M20/M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 100 mm, the height-adjustment range is + 35 mm.

Frame and cover made of stainless steel and visible in the floor covering.

The scope of delivery contains a double protective contact socket.

Up to two modular data sockets can be installed in the optional mounting support.

**UDHOME2 floor socket, without floor covering recess, double NF, stainless steel**



Type	Dimension h mm	Floor height mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME2 GVN</b>	100	100 - 135	1	220.000	<b>7368332</b>

A2 Stainless steel, rustproof

Square floor socket for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipes (M20/M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 100 mm, the height-adjustment range is + 35 mm.

Frame and cover made of stainless steel and visible in the floor covering.

The scope of delivery contains a double NF socket.

Up to two modular data sockets can be installed in the optional mounting support.


## UDHOME2 floor socket, with floor covering recess, freely equippable, stainless steel

Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME2 GV15</b>	110	110 - 135	15	1	230.000	<b>7368340</b>

A2 Stainless steel, rustproof

Square floor socket for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipes (M20/M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 110 mm, the height-adjustment range is + 25 mm.

Frame and cover made of stainless steel and visible in the floor covering. Up to 2 modular data sockets can be installed in the optional mounting support.




## UDHOME2 floor socket, with floor covering recess, freely equippable, brass

Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME2 GM15</b>	—	110 - 135	15	1	230.000	<b>7368346</b>

CuZn Brass

Square floor socket for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipes (M20/M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 110 mm, the height-adjustment range is + 25 mm.

Frame and cover made of brass and visible in the floor covering. Up to 2 modular data sockets can be installed in the optional mounting support.





## UDHOME2 floor socket, without floor covering recess, freely equippable, stainless steel

Type	Dimension h mm	Floor height mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME2 GV</b>	100	100 - 135	1	220.000	<b>7368342</b>

A2 Stainless steel, rustproof

Square floor socket for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipes (M20/M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 100 mm, the height-adjustment range is + 35 mm.

Frame and cover made of stainless steel and visible in the floor covering. Up to 2 modular data sockets can be installed in the optional mounting support.





## UDHOME2 floor socket, without floor covering recess, freely equippable, brass

Type	Dimension h mm	Floor height mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME2 GM</b>	100	100 - 135	1	216.000	<b>7368348</b>


CuZn Brass

Square floor socket for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipes (M20/M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 100 mm, the height-adjustment range is + 35 mm.

Frame and cover made of brass and visible in the floor covering. Up to 2 modular data sockets can be installed in the optional mounting support.



## UDHOME2 height extension 60 mm



**Type**


**HE 60UH2**

Si Steel

Height-adjustable extension for UDHOME2 floor socket. Load capacity up to 8 kN. Additional height-adjustment range: 10–60 mm

Pack	Weight	Item no.
Piece	kg/100 pc.	
1	71.600	7368418

## UDHOME2 data technology support type A



**Type**


**DT UH2 A**

A2 Stainless steel, rustproof

Mounting support to accommodate two data connection modules of type A: AMP TYCO: Standard 110Connect, SL Series 110Connect and Toolless, AMP-Twist; Brand-Rex: unshielded; GG45; TKM RJ MOD; Nexans: LANmark with Adapter-Clip; Siemon CAT6; 3M K6 and K10. Dimensions of a mounting opening in mm: 20.10 x 14.80.

Pack	Weight	Item no.
Piece	kg/100 pc.	
1	9.300	7368470

## UDHOME2 data technology support type B



**Type**


**DT UH2 B**

A2 Stainless steel, rustproof

Mounting support to accommodate two data connection modules of type B: E-DAT; Dätwyler: MS and MS-N; Kerpen: VarioKeystone. Dimensions of a mounting opening in mm: 19.35/21.55 x 14.85.

Pack	Weight	Item no.
Piece	kg/100 pc.	
1	9.000	7368472

## UDHOME2 data technology support type C



**Type**


**DT UH2 C**

A2 Stainless steel, rustproof

Mounting support to accommodate two data connection modules of type C: Brand-Rex: shielded; EKU: E-Stone; Dätwyler: KS-T, MS-K and KU-T; R&M: Snap-In and Keystone; Rutenbeck: UM and UMflex; SETEC: MKJ, UKJ and XKJ; Siemon TERA; Telegärtner: AMJ and UMJ. Dimensions of a mounting opening in mm: 19.30 x 14.80.

Pack	Weight	Item no.
Piece	kg/100 pc.	
1	9.300	7368474

## UDHOME2 data technology support type F



**Type**


**DT UH2 F**

A2 Stainless steel, rustproof

Mounting support to accommodate two data connection modules of type F: Avaya/Systemax: M series. Dimensions of a mounting opening in mm: 17.40 x 16.60.

Pack	Weight	Item no.
Piece	kg/100 pc.	
1	9.600	7368476

## UDHOME2 data technology support type LE



**Type**

**DT UH2 LE**

A2 Stainless steel, rustproof


Mounting support to accommodate two data connection modules of type LE: LexCom 125 and 250. Dimensions of a mounting opening in mm: 18.30 x 17.20.

Pack	Weight	Item no.
Piece	kg/100 pc.	
1	9.300	7368478

## Cord outlet with handle clamp

Type	Colour	Pack Piece	Weight kg/100 pc.	Item no.
SA UH2 G	—	1	6.500	7368426


Cord outlet with handle clamp to replace the UDHOME2 floor socket.




## Cord outlet with opening contour

Type	Colour	Pack Piece	Weight kg/100 pc.	Item no.
SA UH2	—	1	6.500	7368425

Cord outlet with opening contour to replace the UDHOME2 floor socket.



### UDHOME2 floor socket, with tube body, double VDE, stainless steel




Type	Dimension mm	Floor height mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME2 VF V</b>	110	110 - 130	1	323.000	<b>7368410</b>

A2 Stainless steel, rustproof

Square floor socket for use in wet-care cavity and screed floors. Cable exit for height-adjustable tube body. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 110 mm, the height-adjustment range + 20 mm.

The scope of delivery contains a double protective contact socket. Up to two modular data sockets (Keystones) can be installed with optional mounting supports.

### UDHOME2 floor socket, with tube body, double NF, stainless steel




Type	Dimension mm	Floor height mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME2 VF N</b>	110	110 - 130	1	323.000	<b>7368411</b>

A2 Stainless steel, rustproof

Square floor socket for use in wet-care cavity and screed floors. Cable exit for height-adjustable tube body. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 110 mm, the height-adjustment range + 20 mm.

The scope of delivery contains a double NF socket. Up to two modular data sockets (Keystones) can be installed with optional mounting supports.

### UDHOME2 floor socket, with tube body, freely equippable, stainless steel




Type	Dimension mm	Floor height mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME2 VF</b>	110	110 - 130	1	315.000	<b>7427095</b>

A2 Stainless steel, rustproof

Square floor socket for use in wet-care cavity and screed floors. Installation housing with pre-marked insertion openings for empty pipelines (M20/M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 110 mm, the height-adjustment range + 20 mm.

Up to two Modul 45® sockets can be installed. Up to two modular data sockets (Keystones) can be installed with optional mounting supports.

### Height extension for UDHOME2 floor socket




Type	Height adjustment range mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>HE60 UDHOME2</b>	10 - 60	1	73.400	<b>7368400</b>

SI Steel

FS Strip galvanised

Height-adjustable extension for UDHOME2 floor socket.

### Mounting support, 2 x type A

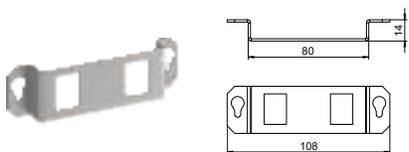


Type	Pack Piece	Weight kg/100 pc.	Item no.
<b>MTGE2F 2A</b>	1	0.380	<b>7407841</b>

A2 Stainless steel, rustproof 1.4301

Mounting support to accept two data connection modules of the following types: AMP TYCO: Standard 110Connect, SL Series 110Connect and Toolless, AMP-Twist; Brand-Rex: unshielded; GG45; TKM RJ MOD; Nexans: LANmark with Adapter-Clip; Siemon CAT6; 3M K6 and K10.

Dimensions of a mounting opening in mm: 20.10 x 14.80.

### Mounting support, 2 x type B

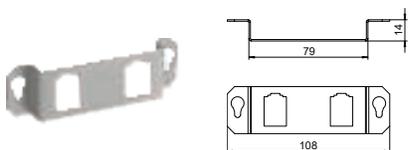


Type	Pack Piece	Weight kg/100 pc.	Item no.
<b>MTGE2F 2B</b>	1	0.260	<b>7407842</b>

A2 Stainless steel, rustproof 1.4301

Mounting support to accept two data connection modules of the following types BTR: E-DAT; Dätwyler: MS and MS-N; Kerpen: Variostone.

Dimensions of a mounting opening in mm: 19.35/21.55 x 14.85.

### Mounting support, 2 x type C

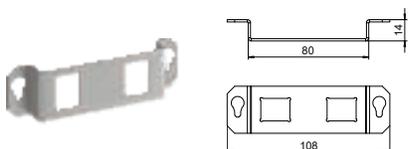


Type	Pack Piece	Weight kg/100 pc.	Item no.
<b>MTGE2F 2C</b>	1	0.380	<b>7407843</b>

A2 Stainless steel, rustproof 1.4301

Mounting support to accept two data connection modules of the following types: Brand-Rex: shielded; EKV: E-Stone; Dätwyler: KS-T, MS-K and KU-T module; R&M: Snap-In and Keystone; Rutenbeck: UM and UMflex; SETEC: MKJ, UKJ and XKJ; Siemon TERA; Telegärtner: AMJ and UMJ.

Dimensions of a mounting opening in mm: 19.30 x 14.80.

### Mounting support, 2 x type F

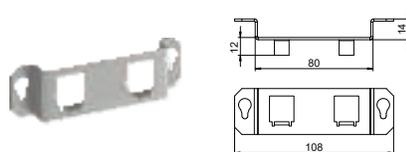


Type	Pack Piece	Weight kg/100 pc.	Item no.
<b>MTGE2F 2F</b>	1	0.410	<b>7407853</b>

A2 Stainless steel, rustproof 1.4301

Mounting support to accept two data connection modules, type Avaya/Systemax: M series.

Dimensions of a mounting opening in mm: 17.40 x 16.60.

### Mounting support, 1 x type K

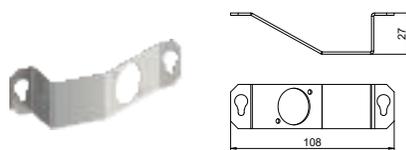


Type	Pack Piece	Weight kg/100 pc.	Item no.
<b>MTGE2F 1K</b>	1	0.400	<b>7407854</b>

A2 Stainless steel, rustproof 1.4301

Mounting support to incorporate an audio or video technology connection socket, type XLR, Speakon type D.

### Mounting support, 2 x type LE

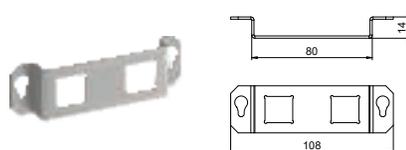


Type	Pack Piece	Weight kg/100 pc.	Item no.
<b>MTGE2F 2LE</b>	1	0.370	<b>7407854</b>

A2 Stainless steel, rustproof 1.4301

Mounting support to accept two data connection modules of the following types: LexCom 125 and 250.

Dimensions of a mounting opening in mm: 18.30 x 17.20.


### Connection module Cat. 5, unshielded, snap-in

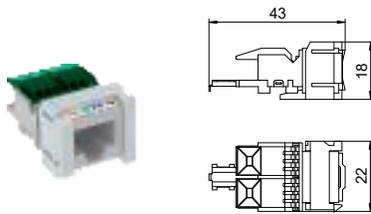

Type	Pack Piece	Weight		Item no.
		kg/100 pc.		
<b>ASM-C5 S</b>	1	1.120		<b>6117347</b>

Connection module Cat. 5e unshielded, with a RJ45 slot. Including a dust cover, a cable tie, a snap-in fastening frame and mounting instructions. Suitable for installation in support plates, type MTM 2C and MTM 3C, mounting plate type MPR2 2C, mounting support type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.


### Connection module Cat. 6, shielded, snap-in

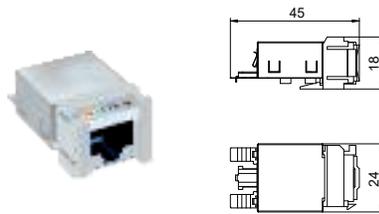

Type	Pack Piece	Weight		Item no.
		kg/100 pc.		
<b>ASM-C6 GS</b>	1	1.850		<b>6117345</b>

Connection module Cat. 6 shielded, with a RJ45 slot. Including an EMC screen hood, a dust cover, a cable tie, a snap-in fastening frame and mounting instructions. Suitable for installation in support plates, type MTM 2C and MTM 3C, mounting plate type MPR2 2C, mounting support type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.


### Connection module Cat. 5, shielded, snap-in

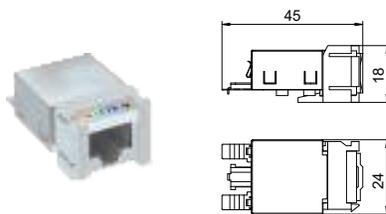

Type	Pack Piece	Weight		Item no.
		kg/100 pc.		
<b>ASM-C5 GS</b>	1	1.920		<b>6117343</b>

Connection module Cat. 5e shielded, with a RJ45 slot. Including an EMC screen hood, a dust cover, a cable tie, a snap-in fastening frame and mounting instructions. Suitable for installation in support plates, type MTM 2C and MTM 3C, mounting plate type MPR2 2C, mounting support type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.


### Connection module Cat. 6A, unshielded, snap-in

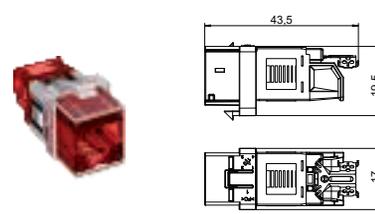

Type	Pack Piece	Weight		Item no.
		kg/100 pc.		
<b>ASM-C6A</b>	1	1.050		<b>6117348</b>

Connection module Cat. 6A (ISO) unshielded, with an RJ45 slot. Including a dust cover, a cable tie, a Keystone fastening frame and mounting instructions. Suitable for installation in the data technology supports of type DTG-2C and DTS-2C, support plate of type MTM 2C and MTM 3C, mounting plate of type MPR2 2C, mounting supports of type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.


### Connection module Cat. 6, unshielded, snap-in

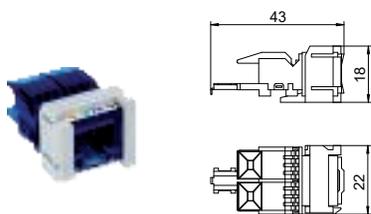

Type	Pack Piece	Weight		Item no.
		kg/100 pc.		
<b>ASM-C6 S</b>	1	1.060		<b>6117349</b>

Connection module Cat. 6 unshielded, with a RJ45 slot. Including a dust cover, a cable tie, a snap-in fastening frame and mounting instructions. Suitable for installation in support plates, type MTM 2C and MTM 3C, mounting plate type MPR2 2C, mounting support type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.

### Connection module Cat. 6A, shielded, snap-in

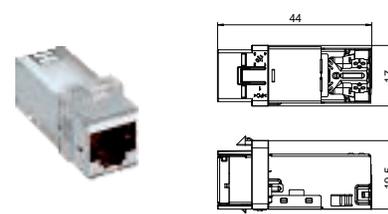

Type	Pack Piece	Weight		Item no.
		kg/100 pc.		
<b>ASM-C6A G</b>	1	1.630		<b>6117346</b>

Connection module Cat. 6A (ISO) shielded, with an RJ45 slot. Including an EMC screen hood, a dust cover, a cable tie, a Keystone fastening frame and mounting instructions. Suitable for installation in the data technology supports of type DTG-2C and DTS-2C, support plate of type MTM 2C and MTM 3C, mounting plate of type MPR2 2C, mounting supports of type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.

## UDHOME4 floor box, with universal support UT3, triple VDE, stainless steel

Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME4 2V V</b>	95	95 - 125	15	1	380.000	<b>7427200</b>

A2 Stainless steel, rustproof 1.4301

Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of stainless steel.

The scope of delivery contains two UT3 universal supports, a triple power socket with cover plate and two individual cover plates for accessories with support ring.



## UDHOME4 floor box, with universal support UT3, triple VDE, brass


Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME4 2M V</b>	95	95 - 125	15	1	388.000	<b>7427204</b>

CuZn Brass

Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of brass.

The scope of delivery contains two UT3 universal supports, a triple power socket with cover plate and two individual cover plates for accessories with support ring.



## UDHOME4 floor box, with universal support UT3, triple NF, stainless steel


Type	Dimension h mm	Screed height mm	Floor height mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME4 2V N</b>	95	95 - 110	95 - 125	1	414.000	<b>7427208</b>

A2 Stainless steel, rustproof 1.4301

Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. 15 mm floor covering recess in the hinged cover. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

The scope of delivery contains two UT3 universal supports, a triple NF socket with cover plate and two individual cover plates for accessories with support ring.

Surfaces visible in the floor covering made of: Stainless steel, material 1.4301.



## UDHOME4 floor box, with universal support UT3, freely equippable, stainless steel


Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME4 2V UT U</b>	95	95 - 125	15	1	402.700	<b>7427248</b>

A2 Stainless steel, rustproof 1.4301


Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of stainless steel.

The scope of delivery contains two universal supports UT3 45 3 for the installation of up to 6 M45 devices.



**UDHOME4 floor box, with universal support UT3 45 3, triple NF, stainless steel**




Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Material	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME4 2V UT N</b>	95	95 - 125	A2		1	413.000	<b>7427224</b>

A2 Stainless steel, rustproof 1.4301

Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipes (M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. 15 mm floor covering recess in the hinged cover. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

The scope of delivery contains two universal supports UT3 45 3 and one triple NF socket. Up to three additional M45 devices can be installed.

**UDHOME4 floor box, with universal support UT3 45 3, triple VDE, stainless steel**



Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Material	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME4 2V UT V</b>	95	95 - 125	15		1	413.000	<b>7427216</b>


A2 Stainless steel, rustproof 1.4301

Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces made of stainless steel and visible in the floor covering.

The scope of delivery contains two universal supports UT3 45 3 and a triple protective contact socket. Up to three additional M45 devices can be installed.

**UDHOME4 floor box, freely equippable, stainless steel**




Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Material	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME4 2V</b>	95	95 - 125	15		1	384.000	<b>7427232</b>

A2 Stainless steel, rustproof 1.4301

Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of stainless steel.

**UDHOME4 floor box, freely equippable, brass**



Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Material	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME4 2M</b>	95	95 - 125	15		1	344.800	<b>7427236</b>

CuZn Brass

Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of brass.

## UDHOME4 floor box, with I4 mounting support, freely equippable, stainless steel


Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME4 2V I4</b>	110	110 - 140	15	1	364.000	<b>7427074</b>

A2 Stainless steel, rustproof 1.4301

Square floor box for four installation devices of Italian design, for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. 15 mm floor covering recess in the hinged cover. The minimum installation depth is 110 mm, the height-adjustment range + 30 mm.

The scope of delivery contains a mounting support.

Surfaces made of stainless steel and visible in the floor covering.




## Height extension for UDHOME4 floor box

Type	Height adjustment range mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>HE60 UDHOME4</b>	10 - 60	1	109.800	<b>7427440</b>



St Steel

FS Strip galvanised

Height-adjustable expansion for UDHOME4 floor box.



**UDHOME9 floor box, two double VDE, stainless steel**



Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME9 2V UT V</b>	95	95 - 125	15	1	520.500	<b>7427300</b>



A2 Stainless steel, rustproof 1.4301

Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of stainless steel.

The scope of supply contains three universal supports UT4 for installation of Modul 45 devices. One universal support is equipped with two double protective contact sockets in pure white. A further universal support is equipped with two cover plates for standard device installation and the third universal support is equipped with two blanking covers.

**UDHOME9 floor box, two double VDE, brass**



Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME9 2M UT V</b>	95	95 - 125	15	1	573.000	<b>7427304</b>


CuZn Brass

Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of brass.

The scope of supply contains three universal supports UT4 for installation of Modul 45 devices. One universal support is equipped with two double protective contact sockets in pure white. A further universal support is equipped with two cover plates for standard device installation and the third universal support is equipped with two blanking covers.

**UDHOME9 floor box, two double NF, stainless steel**



Type	Dimension h mm	Floor height mm	Material	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME9 2V UT N</b>	95	95 - 125	A2	1	520.000	<b>7427316</b>


A2 Stainless steel, rustproof 1.4301

Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipes (M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. 15 mm floor covering recess in the hinged cover. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

The scope of delivery contains 3 universal supports UT4 45 4 for direct mounting of Modul 45 devices. Of these, one is equipped with two double NF sockets in pure white.

Surfaces visible in the floor covering made of: Stainless steel, material 1.4301.

**UDHOME9 floor box, two double VDE, stainless steel**



Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME9 2V UT45V</b>	95	95 - 125	15	1	520.000	<b>7427308</b>

A2 Stainless steel, rustproof 1.4301

Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of stainless steel.

The scope of supply contains three universal supports UT4 45 4 for direct mounting of Modul 45 devices. Of these, one is equipped with two double protective contact sockets in pure white.

## UDHOME9 floor box, with I14 mounting supports, stainless steel


Type	Dimen- sion h mm	Floor height mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME9 2V I14</b>	110	110 - 140	15	1	544.000	<b>7427076</b>

A2 Stainless steel, rustproof 1.4301

Square floor box for 14 installation devices of Italian design, for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. 15 mm floor covering recess in the hinged cover. The minimum installation depth is 110 mm, the height-adjustment range + 30 mm.

The scope of delivery contains a mounting support.

Surfaces made of stainless steel and visible in the floor covering.




## UDHOME9 floor box, freely equippable, stainless steel

Type	Dimen- sion h mm	Floor height mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME9 2V</b>	95	95 - 125	15	1	470.000	<b>7427324</b>

A2 Stainless steel, rustproof 1.4301

Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of stainless steel.





## UDHOME9 floor box, freely equippable, brass

Type	Dimen- sion h mm	Floor height mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>UDHOME9 2M</b>	95	95 - 125	15	1	482.000	<b>7427328</b>

CuZn Brass

Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of brass.




## Height extension for UDHOME9 floor box

Type	Height adjustment range mm	Pack Piece	Weight kg/100 pc.	Item no.
<b>HE60 UDHOME9</b>	10 - 60	1	145.700	<b>7427444</b>

St Steel

FS Strip galvanised

Height-adjustable expansion for UDHOME9 floor box.



OBO Bettermann Holding GmbH & Co. KG  
P.O. Box 1120  
58694 Menden  
GERMANY

Customer Service  
Tel.: +49 23 73 89 - 17 00  
Fax: +49 23 73 89 - 12 38  
[export@obo.de](mailto:export@obo.de)

[www.obo-bettermann.com](http://www.obo-bettermann.com)

---

**Building Connections**

