


# Simply plugged in.

Never leave without them.

## Universal screwless terminal

The easiest way to connect or disconnect cables and wires: OBO's new screwless connection terminals for flexible and rigid cables.

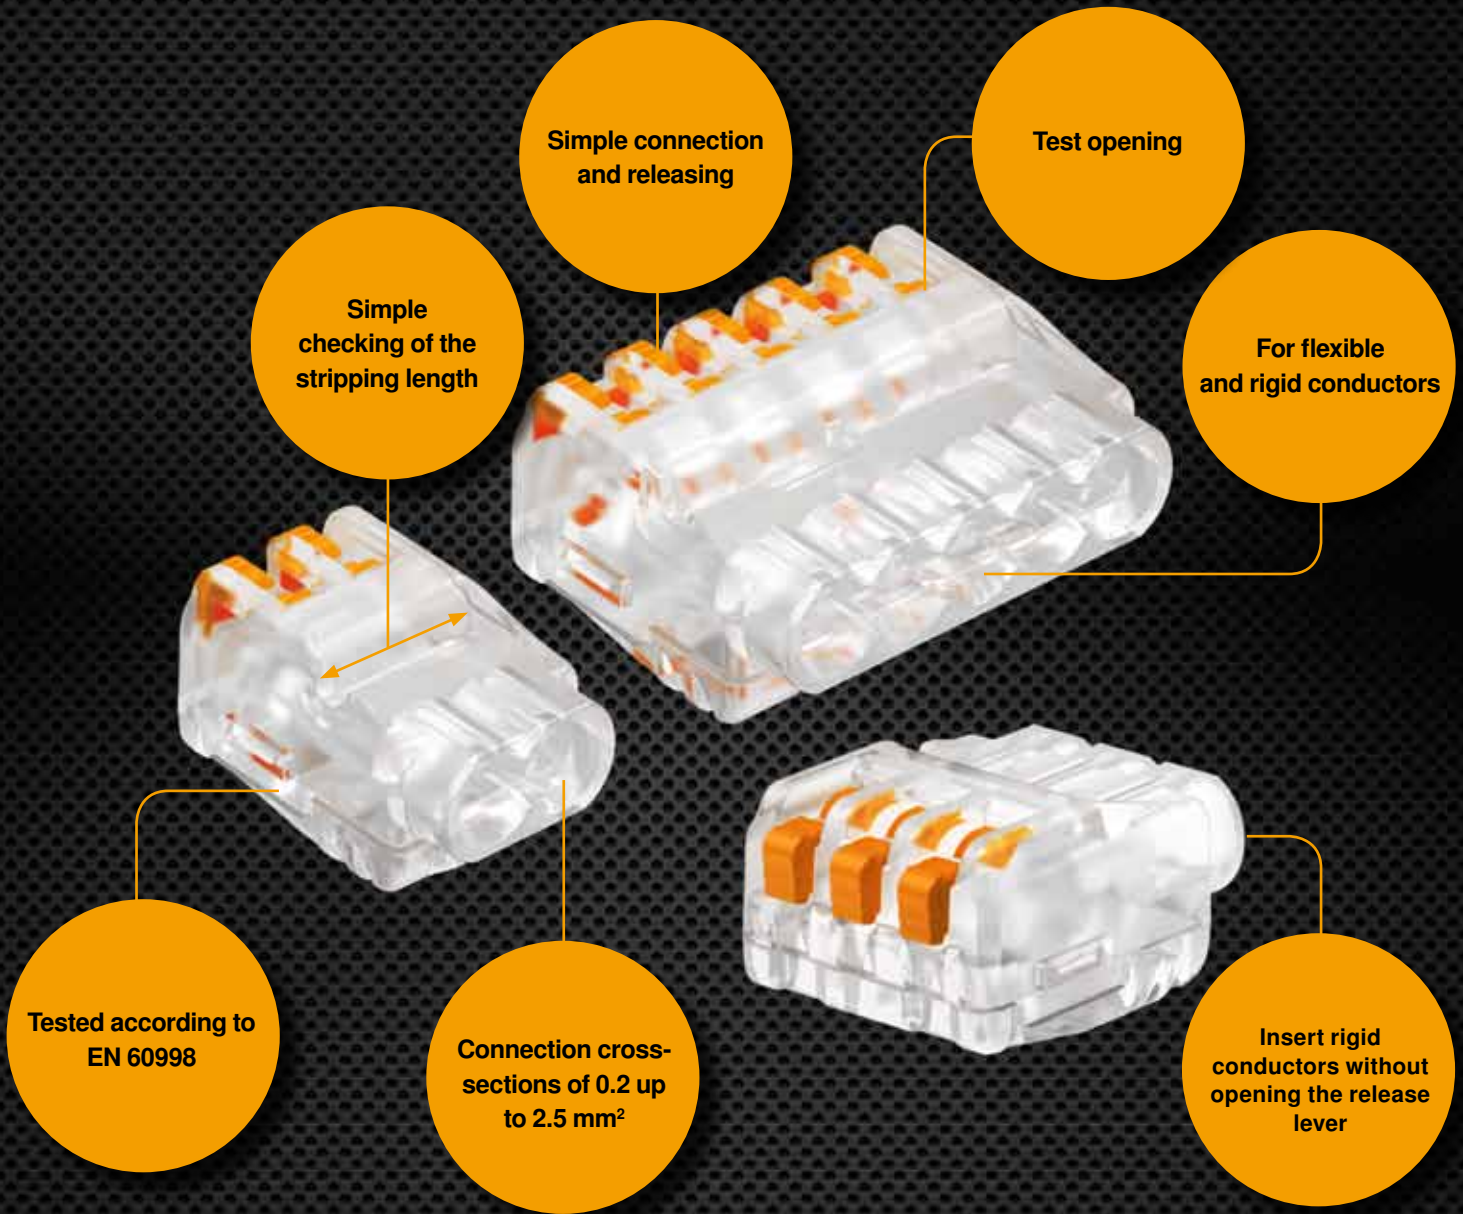

OBO BETTERMANN Customer Service  
Tel.: +49 (0)2373-89-1500 · e-Mail: [export@obo.de](mailto:export@obo.de)  
[www.obo-bettermann.com](http://www.obo-bettermann.com)



# The new universal screwless terminals



## Technical data

<b>Nominal cross-section</b>	0.2 mm <sup>2</sup> - 2.5 mm <sup>2</sup> multi-wire conductors or single-wire conductors
<b>Nominal voltage</b>	450 V
<b>Nominal current</b>	24 A
<b>Stripping length</b>	9 mm (+1 mm)
<b>Test opening</b>	Phase tester and testing pin (max. Ø 2 mm) easily accessible on the top side of the terminal
<b>Max. approved ambient temperature according to EN 60998</b>	85°C

## Technical data UL (USA)

<b>Nominal voltage</b>	600 V
<b>Nominal current</b>	20 A
<b>Clamping range</b>	AWG 14-24
<b>Max. approved ambient temperature</b>	120°C

## Universal screwless terminal, 2-pin



Type	Colour	Shipping box pcs	Pack. pcs	Weight kg/100 pcs.	Item No.
<b>61 225 FL</b>	Transparent	2000	100	0,200	<b>2054 45 0</b>
PC Polycarbonate					/100 pc.

## Universal screwless terminal, 3-pin



Type	Colour	Shipping box pcs	Pack. pcs	Weight kg/100 pcs.	Item No.
<b>61 325 FL</b>	Transparent	1500	75	0,270	<b>2054 45 4</b>
PC Polycarbonate					/100 pc.

## Universal screwless terminal, 5-pin



Type	Colour	Shipping box pcs	Pack. pcs	Weight kg/100 pcs.	Item No.
<b>61 525 FL</b>	Transparent	1000	50	0,410	<b>2054 45 8</b>
PC Polycarbonate					/100 pc.

OBO BETTERMANN Customer Service  
Tel.: +49 (0) 23 73-89-1500 · e-Mail: [export@obo.de](mailto:export@obo.de)  
[www.obo-bettermann.com](http://www.obo-bettermann.com)

**OBO**  
BETTERMANN